

VISION. CUSTOMER. INNOVATION. CULTURE.



30 years + experience

Producing PVC products as per international Quality Standards since 1992



Over 5000+ Clients Served

Growth through Creativity & Innovation Service.



Top Exporter Annual Award

Recipient since 2002. One Star Export House, AEO(Advance Economic operator)



Our Capabilities

Coating, Calendering, Printing, Lamination, Embossing, Complete in-house testing with own fabric manufacturing



Manufacturing Location

Spread over a ten acre campus. Just 30 minutes from New Delhi

ABOUT US

PPL is India's leading manufacturer of quality PVC products with over 30 years of unwavering commitment to excellence.

Established in 1992 by Shri A.N. Goenka, a veteran in the industry, PPL is known for its innovative solutions and adherence to international quality standards.



With a diverse range of capabilities, including coating, calendering, printing, lamination, embossing, and complete in-house testing, we ensure that every product meets the highest standards of quality and reliability.

A NOTE FROM OUR MANAGING DIRECTOR



"I joined Premier Polyfilm (PPL) in 1998. Its been 25 years of a lot of learning, experience and challenges that life throws at you. Plastic Processing is a competitive industry. Survival I think universally now is not just the Fittest, but much more to do with good intentions and a Kaizen approach to do better than yesterday, we approach each new day. In 2023, Premier Celebrated 30 years, a journey of grit, dedication, truth, trust and goodwill. I am thankful to our team, our customers & our suppliers. Invite you to give us an opportunity, where we can meet your Product Requirements and Challenges."

- Amitaabh Goenka

OUR CORE VALUES



Our vision

is to be the most preferred supplier of PVC vinyl quality products, achieved through innovation, creativity, and unwavering commitment to excellence.



Customer

Committed to consistently exceeding the customers expectations by delivering high-quality solutions and exceptional service.



Innovation


Embracing a culture of continuous improvement and new technologies to drive innovation in PVC calendared products through advanced manufacturing process and techniques.




Culture

Fostering a collaborative and work environment that values diversity, creativity, and a shared commitment to excellence.



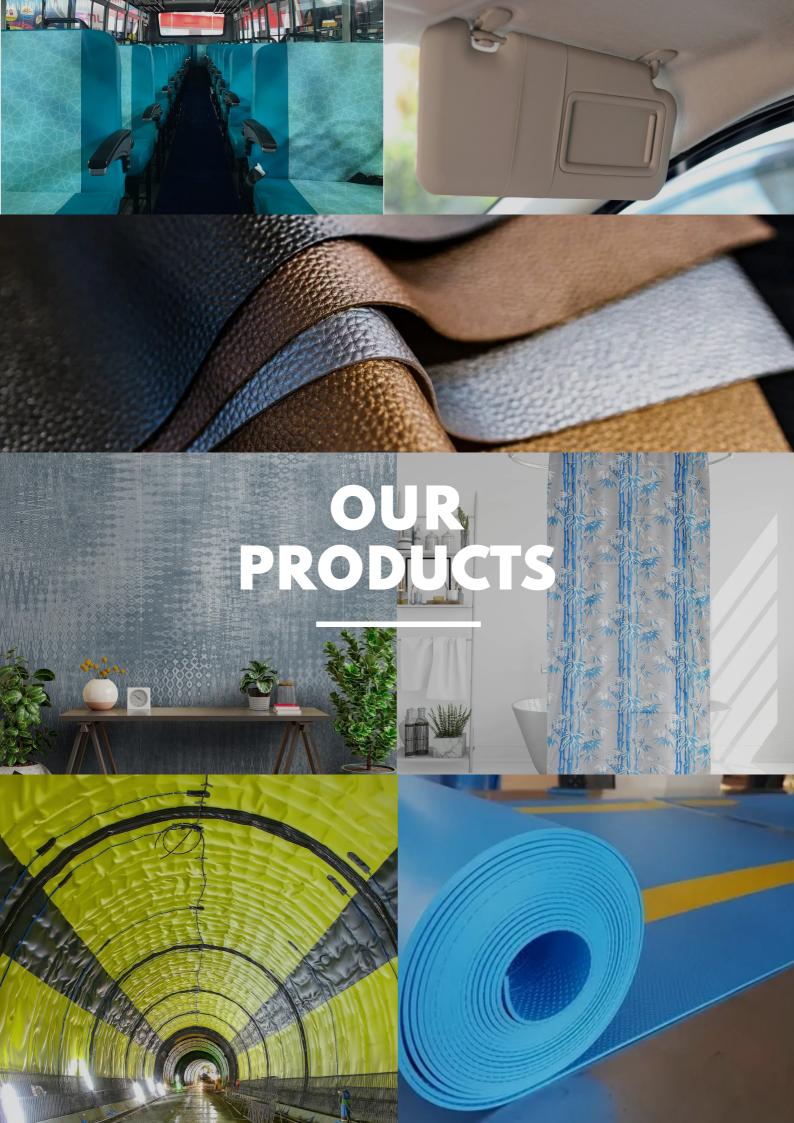

Range Of PVC Flooring

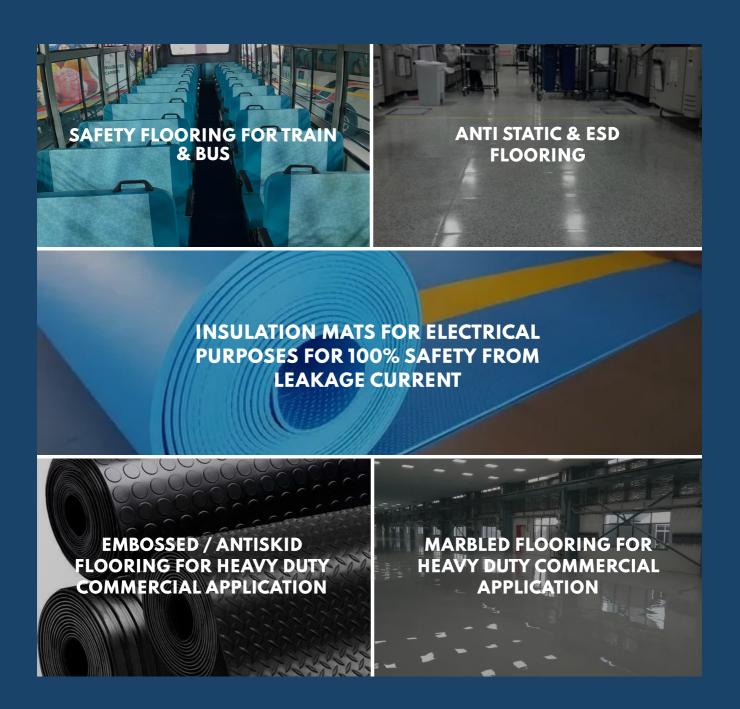





These are Heavy duty Anti-slip flooring rolls with a Non-Directional chip pattern & silicon carbide granules on the top surface. They impart a high degree of slip resistance and mostly used in Train & Buses.

We are one of the oldest suppliers of Flooring & upholstery cloth to the Indian Railways

SALIENT FEATURES



Fully flexible Resilient flooring offering superb abrasion resistance & high in slip resistance



Meets Fire & Smoke properties, suitable for use in Trains & Buses



Also Available with Glass Scrim Reinforcement for high Dimensional Stability

SPECIFICATIONS	
THICKNESS	1.50mm, 2.00mm & 3.00mm
ROLL WIDTH	1.50 Mtr & 2.00 Mtrs
ROLL LENGTH	15mtr

Marbled Flooring FOR HEAVY DUTY COMMERCIAL APPLICATION

SALIENT FEATURES



Dynamic & fully flexible resilient flooring



Quick cleaning & easy maintenance

Recommended for Offices, Porta Cabins, Auditoriums, schools, libraries, healthcare etc. Heavy duty flooring rolls with marbled design, ideal for places like Factories, Prefabricated building sector, Offices, Porta cabin etc.

SPECIFICATIONS	
THICKNESS	1.0 mm to 2.0 mm
ROLL WIDTH	1.50 mtr, 2.0 mtr
AVAILABLE (READY STOCK) IN RANGE OF SHADES	

Antistatic & ESD Flooring

Antistatic / ESD flooring is a very effective safeguard against the loss of data, malfunctioning of sensitive electronic equipment or computers. This flooring is highly recommended for controlling the generation, accumulation & dissipation of static charges, ensuring optimal protection.

SALIENT FEATURES



Surface Electrical Resistance Antistatic Flooring: $5x10^7$ to $5x10^8$ Ohms, Conductive flooring range upto $5x10^4$ Ohms



For area where controlling generation, accumulation & dissipation of static charge is necessary

SPECIFICATIONS	
THICKNESS	2.00 mm
ROLL WIDTH	1.50 mtr, 2.00 mtr
ROLL LENGTH	20 mtr linear mt , 15 linear mtr
AVAILABLE (READY STOCK)	Tiles 305mm x 305mm & 610mm x 610mm

Embossed / Antiskid Flooring FOR HEAVY DUTY COMMERCIAL APPLICATION

SALIENT FEATURES



They are 'M" or "P" rated depending upon thickness and have a slip resistance of R1O



Can be produced with Low Fire & Smoke properties for Buses & trains



Custom colours can be produced based on the customer's preference



Embossed flooring are also available with a polyester felt backing

Embossed Floorings have a deep embossed top surface, which is meant to provide extra grip for safe movements. These floorings are produced in a wide range of deep embossing designs which provides Designs Chequer Plate. Coin. Dew Drops, Hexagon, Diamond, etc are very popular & provide a neat geometrical pattern on the floor.

SPECIFICATIONS	
THICKNESS	0.80 mm to 3.00 mm
ROLL WIDTH	1 mtr, 1.5 mtr & 2mtr
ROLL LENGTH	15 to 30 mtr



"ELECTROMAT" Insulating Mats are required for safety of workers working on upto AC 33KV & DC 240V installations in all kinds of sub-stations operating HT, switch-gears, control panels, transformer rooms. battery rooms, generator rooms and bus bar panels etc.

SALIENT FEATURES

- · Fire Retardant
- · High Tensile Strength
- · High Dielectric Strength
- High Insulation
 Resistance
- · Made from Elastomer
- Moisture Proof & Easy to Clean
- · Life Span 10 to 15 years
- Confirming to IS : 15652-2006
- · CPRI & ERDA LAB Tested

SPECIFICATIONS		
THICKNESS & APPLICABLE VOLTAGE	DI-ELECTRIC STRENGTH AS PER IS: 15652:2006	
2.0 MM FOR 3.3 KV	Min 30KV	
2.50 MM FOR 11 KV	Min 45KV	
3.0 MM FOR 33 KV	Min 65KV	

PVC Flooring Installation Accessories

PPL provides complete range of accessories for installation of their flooring products



PVC Welding Cords

PVC welding cords are used for smooth installation of floor covering. Welding rods are available in a range of colours designed to blend with the floor coverings.



PVC Skirting

Skirting can help define where the floor ends and the wall begins and hence it provides a neat joint between the wall and the floor.



PVC Capping

PVC Capping strip gives a neat finish to the installation and ensures continuous, sealed surface.



PVC Corner Guard

PVC corner guards protect exposed parts and the vulnerable corners against the roughest treatment.



PVC Coving

These tough covings give protection to the wall decorations at floor level.



PVC Stair Nosing

PVC Stair Nosing help to reduce accidents on stairs by offering slipresistance.



SALIENT FEATURES

- · Fire Safety Standard:
- ASTM, EN, IS, CRIB-5, EN-45545/HL-3
- · Non-Fading UV Resistance
- · Super Anti-Slip
- · Stay Clean
- · Acoustic Properties
- · 10 C Cooler Stay Cool
- Anti Fungal / Anti BacterialTreated
- · Weather Resistant
- · Heavy Metal Free
- · High Abrasion Resistance
- · ROHS Compliance
- · Salt Water Resistant

Serving the Automotive & Transport Industries PVC Artificial Leather Seating & Interior Needs for Trains, Buses, Cars, Two Wheelers and Marine Transportation. Supplier to automotive OEMs in India & Overseas. PVC Artificial Leather Meeting The Top Safety Standards.

SPECIFICATIONS	
THICKNESS	0.70, 0.80, 0.85, 0.90, 1.00, 1.10, 1.20, 1.50, 1.70 MM
COATING COMPOSITION	100% PVC
FABRIC	Choice of fabric from 100% Polyester, Nylon, Cotton, Woven fabrics & Knitted
WEIGHT	500-1000 GSM
WIDTH	1370 MM STANDARD ALSO AVAILABLE UP TO 60 " WIDE



PVC Films & Sheeting for the Automotive and Transport Industry, Interiors, Tool Kit, Healthcare and numerous household applications. Our range of PVC printed, reverse printed with multiple designs suitable for Raincoat, Table Cover, Urine Bag, Curtain, PVC Tapes, Medical Apron, Stationery Sheeting & All types of PVC Sheets & Films for every need.

SALIENT FEATURES



Heavy Metal Free



High Abrasion Resistance



ROHS Compliance



Non Toxic



Colour Fastness

SPECIFICATIONS

THICKNESS

80 micron up to 0.50 mm can be customized

WIDTH

1370 mm Standard Also Available up to 60 " wide



Self-adhesive vinyl wallpaper to transform your wall space. Over 1000 designs from Stone, Marble, Decorative, Geometrical etc.

SALIENT FEATURES



Self Adhesive



Exceptional Quality



Textured



Easy to Remove



Stain Free



Made in India



1000+ Patterns

SPECIFICATIONS

WIDTH

18", 24" & 36" ALSO AVAILABLE UP TO 54" WIDE can be customized

ROLL LENGTH

30 mtr standard can be customized



SALIENT FEATURES



BIS approval received for AQUALINNING brand name for thickness 0.75MM, 1.50 MM & 2.0 MM



Test reports from reputed labs like M/s. Spectro Labs/Sreeram Lab confirming all the properties meeting the international ASTM & DIN Standards



Undertaking complete turnkey contracts: Supply & Installation

Underground waterproofing PVC membranes are widely used in construction for roofing application due to their flexibility and ease of installation. The materials chemical resistance further enhances durability, making it a very popular choice for protection structures against water infiltration for tunnels.

SPECIFICATIONS	
THICKNESS	0.75, 1.00, 1.50, 2.00 & 3MM
ROLL WIDTH	2mtr
ROLL LENGTH	20 mtr



SALIENT FEATURES

- · Anti microbial
- · Anti stain
- · Chemical resistant
- · UV stable
- NON toxic
- · 10 years warranty

These liners are used in swimming pools to save time and money. They have a perfect finish and design of Stone, Marble, Glass Mosaic, Solid Colours etc. with antimicrobial property. Anti-stain, NON Toxic, Chemical resistant, UV stable, 10 years Warranty. These are produced in rolls from 1.50mm thickness and up to 2 meters width.

SPECIFICATIONS	
THICKNESS	1.50 MM
ROLL WIDTH	1.8 mtr, 2.0 mtr
ROLL LENGTH	20 mtr





VISION. CUSTOMER. INNOVATION. CULTURE.

















Polyfabs

REGISTERED OFFICE

305, Elite House, Ill Floor, 36, Community Centre, Kailash Colony Extn., Zamroodpur, New Delhi - 110048

UNIT 1

40/1A, Site-IV, Sahibabad Industrial Area Ghaziabad, 201010, Uttar Pradesh India

UNIT 2

A-11,12 & 13, Industrial Area, Sikandrabad District,





